


PHE GÀI LỖ TIÊU CHUẨN DIN 472


Vật liệu	IN10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)
	IN30R	INOX SUS420 (Độ Cứng 36-44 HRC)

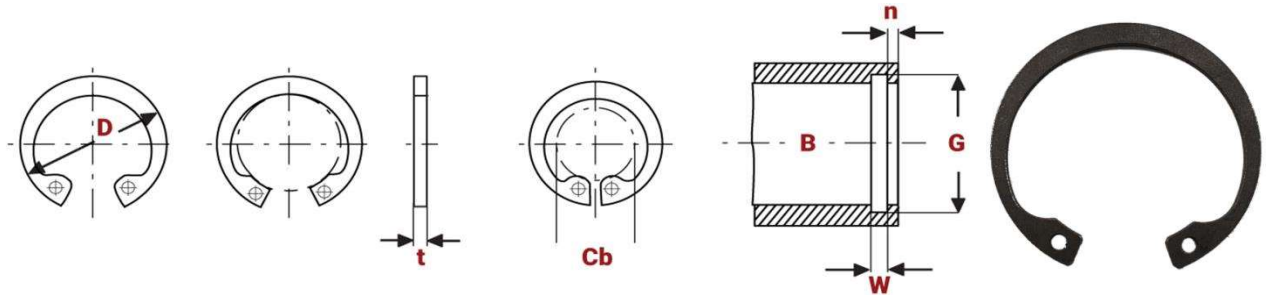

Mã hàng		Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ				
Thép	Inox			D (mm)		t (mm)		G (mm)	W (mm)	n		
				Min	Max	Min	Max					
IN10R8-08	IN30R8-08	8	2.8	8.6	8.7	0.75	0.8	8.4	0.9	0.6		
IN10R9-08	IN30R9-08	9	3.5	9.7	9.8			9.4				
IN10R10-10	IN30R10-10	10	3.1	10.7	10.8	0.94	1.0	10.4	1.1	0.6		
IN10R11-10	IN30R11-10	11	3.9	11.7	11.8			11.4		0.6		
IN10R12-10	IN30R12-10	12	4.7	12.9	13			12.5		0.8		
IN10R13-10	IN30R13-10	13	5.3	14	14.1			13.6		0.9		
IN10R14-10	IN30R14-10	14	6	15	15.1			14.6		0.9		
IN10R15-10	IN30R15-10	15	7	16.1	16.2			15.7		1.1		
IN10R16-10	IN30R16-10	16	7.7	17.2	17.3			16.8		1.2		
IN10R17-10	IN30R17-10	17	8.4	18.17	18.3			17.8		1.5		
IN10R18-10	IN30R18-10	18	8.9	19.37	19.5			19				
IN10R19-10	IN30R19-10	19	9.8	20.37	20.5			20				
IN10R20-10	IN30R20-10	20	10.6	21.37	21.5	21						
IN10R21-10	IN30R21-10	21	11.6	22.37	22.5	22	1.7					
IN10R22-10	IN30R22-10	22	12.6	23.37	23.5	23						
IN10R23-12	IN30R23-12	23	13.6	-	24.6	-	1.2	24.1	1.3	1.7		
IN10R24-12	IN30R24-12	24	14.2	25.69	25.9	25.2		1.8				
IN10R25-12	IN30R25-12	25	15	26.69	26.9	26.2						
IN10R26-12	IN30R26-12	26	15.6	27.69	27.9	27.2		2.1				
IN10R27-12	IN30R27-12	27	16.6	-	29.1	28.4						
IN10R28-12	IN30R28-12	28	17.4	29.85	30.1	29.4						
IN10R29-12	IN30R29-12	29	18.4	-	31.1	30.4						
IN10R30-12	IN30R30-12	30	19.4	31.85	32.1	31.4		1.2		32.7	1.3	2.6
IN10R31-12	IN30R31-12	31	19.6	33.15	33.4	1.14						
IN10R32-12	IN30R32-12	32	20.2	34.15	34.4	1.14		1.5		33.7	1.6	2.6
IN10R33-12	IN30R33-12	33	21.2	-	35.5	-	34.7					
IN10R34-15	IN30R34-15	34	22.2	36.25	36.5	1.44	1.5	35.7	1.6	2.6		
IN10R35-15	IN30R35-15	35	23.2	37.55	37.8	1.44		37		3		
IN10R36-15	IN30R36-15	36	24.2	38.55	38.8	1.44		38		3		
IN10R37-15	IN30R37-15	37	25	39.55	39.8	1.44		39		3		
IN10R38-15	IN30R38-15	38	26	40.55	40.8	1.44		40		3		
IN10R40-175	IN30R40-175	40	27.4	43.11	43.5	1.69	1.75	42.5	1.85	3.8		
IN10R41-175	IN30R41-175	41	28.2	-	44.5	-		43.5		3.8		

PHE GÀI LỖ TIÊU CHUẨN DIN 472

Vật liệu	IN10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)
	IN30R	INOX SUS420 (Độ Cứng 36-44 HRC)

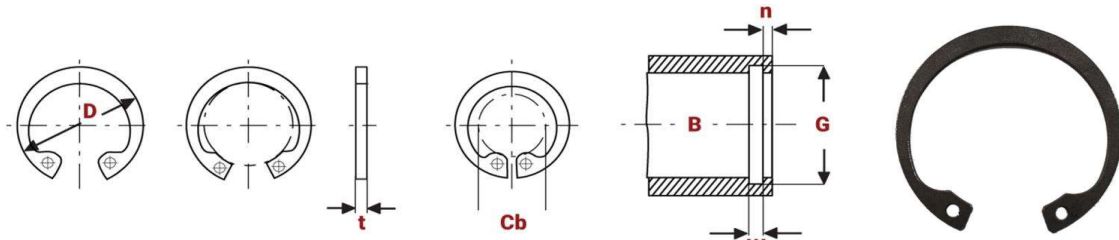

Mã hàng		Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ		
Thép	Inox			D (mm)		t (mm)		G (mm)	W (mm)	n
				Min	Max	Min	Max			
IN10R42-175	IN30R42-175	42	29.2	45.11	45.5	1.69	1.75	44.5	1.85	3.8
IN10R45-175	IN30R45-175	45	31.6	48.11	48.5	1.69		47.5	1.85	3.8
IN10R46-175	IN30R46-175	46	33.2	-	50.5	-		49.5	1.85	3.8
IN10R47-175	IN30R47-175	47	34.6	50.04	51.5	1.69		50.5	1.85	3.8
IN10R48-175	IN30R48-175	48	36	51.04	54.2	1.69	2.0	53	2.15	4.5
IN10R50-20	IN30R50-20	50	37	53.74	55.2	1.93		54	2.15	4.5
IN10R52-20	IN30R52-20	52	37.6	55.74	56.2	1.93		55	2.15	4.5
IN10R54-20	IN30R54-20	54	40.4	-	59.2	-		58	2.15	4.5
IN10R56-20	IN30R56-20	56	41.4	58.74	60.2	1.93	2.0	59	2.15	4.5
IN10R57-20	IN30R57-20	57	42.4	59.74	62.2	1.93		60	2.15	4.5
IN10R58-20	IN30R58-20	58	43.2	61.74	62.2	1.93		61	2.15	4.5
IN10R60-20	IN30R60-20	60	44.4	63.74	64.2	1.93		63	2.15	4.5
IN10R62-20	IN30R62-20	62	46.4	65.74	66.2	1.93	2	65	2.15	4.5
IN10R63-20	IN30R63-20	63	47.4	66.74	67.2	1.93		66	2.15	4.5
IN10R65-25	IN30R65-25	65	48	68.74	69.2	2.43	2.5	68	2.65	4.5
IN10R67-25	IN30R67-25	67	50.6	-	72	-		70	2.65	4.5
IN10R68-25	IN30R68-25	68	51.4	72.04	72.2	2.43		71	2.65	4.5
IN10R70-25	IN30R70-25	70	53.4	74.04	74.5	2.43		73	2.65	4.5
IN10R72-25	IN30R72-25	72	55.4	76.04	76.5	2.43	2.5	75	2.65	4.5
IN10R75-25	IN30R75-25	75	58.4	79.04	79.5	2.43		78	2.65	4.5
IN10R78-25	IN30R78-25	78	60	81.96	82.5	2.43		81	2.65	4.5
IN10R80-25	IN30R80-25	80	62	84.96	85.5	2.43		83.5	2.65	5.3
IN10R82-25	IN30R82-25	82	64	86.96	87.5	2.43	3.0	85.5	2.65	5.3
IN10R85-30	IN30R85-30	85	66.8	89.96	90.5	2.92		88.5	3.15	5.3
IN10R90-30	IN30R90-30	90	71.8	94.96	95.5	2.92	3.0	93.5	3.15	5.3
IN10R92-30	IN30R92-30	92	73.6	96.96	97.5	2.92		95.5	3.15	5.3
IN10R95-30	IN30R95-30	95	76.4	99.96	100.5	2.92		98.5	3.15	5.3
IN10R98-30	IN30R98-30	98	79	102.96	103.5	2.92		101.5	3.15	5.3
IN10R100-30	IN30R100-30	100	81	104.96	105.5	2.92	4	103.5	3.15	5.3
IN10R102-40	IN30R102-40	102	82.6	107.46	108	3.9		106	4.15	6
IN10R105-40	IN30R105-40	105	85.6	111.46	112	3.9		109	4.15	6
IN10R108-40	IN30R108-40	108	88	114.46	115	3.9		112	4.15	6
IN10R110-30	IN30R110-40	110	88.2	116.46	117	3.9	114	4.15	6	