


NON-INSULATED COPPER TUBULAR LUGS (TLK-2A SERIES)

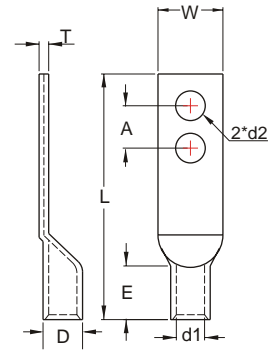

MAXIMUM ELECTRIC CURRENT:

A.W.G.	1/0	2/0	3/0	300	350	500
AMP.	230	265	310	445	505	620

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	STUD SIZE		DIMENSION mm							CRIMPING TOOL	Q'TY BOX
		2 × d2		W	A	D	d1	L	E	T		
1/0 A.W.G. 50 mm ²	TLK50-10-2A	3/8	10.5	23.0	15.0	14.0	10.0	87.0	19.0	3.4	NOVOPRESS MODEL HPM400	50
2/0 A.W.G. 70 mm ²	TLK70-12-2A	1/2	13.0	28.0	38.0	16.5	12.0	99.0	21.0	3.5	NOVOPRESS MODEL HPM400	50
3/0 A.W.G. 95 mm ²	TLK95-10-2A	3/8	10.5	26.0	25.0	18.0	13.5	91.0	25.0	4.4	NOVOPRESS MODEL HPM400	50
300/350 MCM 185 mm ²	TLK185-12-2A	1/2	13.0	35.0	38.0	24.0	19.0	113.0	30.0	4.7	NOVOPRESS MODEL HPM400	10
500 MCM 300 mm ²	TLK300-10-2A	3/8	10.5	43.0	20.0	29.5	23.5	121.0	44.0	6.8	NOVOPRESS MODEL HPM400	5