


PHE GÀ LỖ TIÊU CHUẨN DIN 472


Vật liệu	IN10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)
	IN30R	INOX SUS420 (Độ Cứng 36-44 HRC)

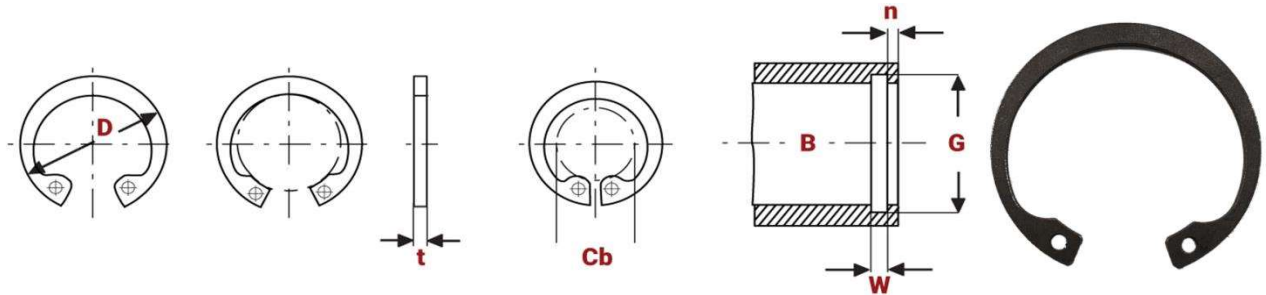

Mã hàng		Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ							
Thép	Inox			D (mm)		t (mm)		G (mm)	W (mm)	n					
				Min	Max	Min	Max								
IN10R8-08	IN30R8-08	8	2.8	8.6	8.7	0.75	0.8	8.4	0.9	0.6					
IN10R9-08	IN30R9-08	9	3.5	9.7	9.8										
IN10R10-10	IN30R10-10	10	3.1	10.7	10.8										
IN10R11-10	IN30R11-10	11	3.9	11.7	11.8										
IN10R12-10	IN30R12-10	12	4.7	12.9	13										
IN10R13-10	IN30R13-10	13	5.3	14	14.1										
IN10R14-10	IN30R14-10	14	6	15	15.1										
IN10R15-10	IN30R15-10	15	7	16.1	16.2										
IN10R16-10	IN30R16-10	16	7.7	17.2	17.3										
IN10R17-10	IN30R17-10	17	8.4	18.17	18.3										
IN10R18-10	IN30R18-10	18	8.9	19.37	19.5										
IN10R19-10	IN30R19-10	19	9.8	20.37	20.5										
IN10R20-10	IN30R20-10	20	10.6	21.37	21.5										
IN10R21-10	IN30R21-10	21	11.6	22.37	22.5										
IN10R22-10	IN30R22-10	22	12.6	23.37	23.5										
IN10R23-12	IN30R23-12	23	13.6	-	24.6	1.14	1.2	24.1	1.3	1.7					
IN10R24-12	IN30R24-12	24	14.2	25.69	25.9										
IN10R25-12	IN30R25-12	25	15	26.69	26.9										
IN10R26-12	IN30R26-12	26	15.6	27.69	27.9										
IN10R27-12	IN30R27-12	27	16.6	-	29.1										
IN10R28-12	IN30R28-12	28	17.4	29.85	30.1										
IN10R29-12	IN30R29-12	29	18.4	-	31.1										
IN10R30-12	IN30R30-12	30	19.4	31.85	32.1										
IN10R31-12	IN30R31-12	31	19.6	33.15	33.4						1.2	1.3	32.7	1.3	2.6
IN10R32-12	IN30R32-12	32	20.2	34.15	34.4										
IN10R33-12	IN30R33-12	33	21.2	-	35.5										
IN10R34-15	IN30R34-15	34	22.2	36.25	36.5	1.5	1.5	35.7	1.6	2.6					
IN10R35-15	IN30R35-15	35	23.2	37.55	37.8										
IN10R36-15	IN30R36-15	36	24.2	38.55	38.8										
IN10R37-15	IN30R37-15	37	25	39.55	39.8										
IN10R38-15	IN30R38-15	38	26	40.55	40.8										
IN10R40-175	IN30R40-175	40	27.4	43.11	43.5						1.75	1.75	42.5	1.85	3.8
IN10R41-175	IN30R41-175	41	28.2	-	44.5										

PHE GÀ LỖ TIÊU CHUẨN DIN 472


Vật liệu	IN10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)
	IN30R	INOX SUS420 (Độ Cứng 36-44 HRC)

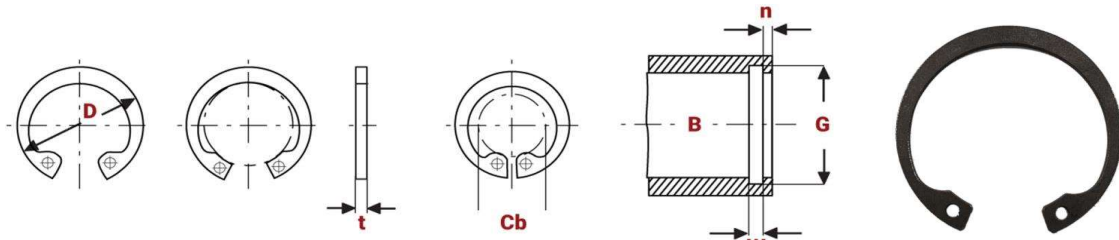

Mã hàng		Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ		
Thép	Inox			D (mm)		t (mm)		G (mm)	W (mm)	n
				Min	Max	Min	Max			
IN10R42-175	IN30R42-175	42	29.2	45.11	45.5	1.69	1.75	44.5	1.85	3.8
IN10R45-175	IN30R45-175	45	31.6	48.11	48.5	1.69		47.5	1.85	3.8
IN10R46-175	IN30R46-175	46	33.2	-	50.5	-		49.5	1.85	3.8
IN10R47-175	IN30R47-175	47	34.6	50.04	51.5	1.69		50.5	1.85	3.8
IN10R48-175	IN30R48-175	48	36	51.04	54.2	1.69	2.0	53	2.15	4.5
IN10R50-20	IN30R50-20	50	37	53.74	55.2	1.93		54	2.15	4.5
IN10R52-20	IN30R52-20	52	37.6	55.74	56.2	1.93		55	2.15	4.5
IN10R54-20	IN30R54-20	54	40.4	-	59.2	-		58	2.15	4.5
IN10R56-20	IN30R56-20	56	41.4	58.74	60.2	1.93	2.0	59	2.15	4.5
IN10R57-20	IN30R57-20	57	42.4	59.74	62.2	1.93		60	2.15	4.5
IN10R58-20	IN30R58-20	58	43.2	61.74	62.2	1.93		61	2.15	4.5
IN10R60-20	IN30R60-20	60	44.4	63.74	64.2	1.93		63	2.15	4.5
IN10R62-20	IN30R62-20	62	46.4	65.74	66.2	1.93	2	65	2.15	4.5
IN10R63-20	IN30R63-20	63	47.4	66.74	67.2	1.93		66	2.15	4.5
IN10R65-25	IN30R65-25	65	48	68.74	69.2	2.43	2.5	68	2.65	4.5
IN10R67-25	IN30R67-25	67	50.6	-	72	-		70	2.65	4.5
IN10R68-25	IN30R68-25	68	51.4	72.04	72.2	2.43		71	2.65	4.5
IN10R70-25	IN30R70-25	70	53.4	74.04	74.5	2.43		73	2.65	4.5
IN10R72-25	IN30R72-25	72	55.4	76.04	76.5	2.43	2.5	75	2.65	4.5
IN10R75-25	IN30R75-25	75	58.4	79.04	79.5	2.43		78	2.65	4.5
IN10R78-25	IN30R78-25	78	60	81.96	82.5	2.43		81	2.65	4.5
IN10R80-25	IN30R80-25	80	62	84.96	85.5	2.43		83.5	2.65	5.3
IN10R82-25	IN30R82-25	82	64	86.96	87.5	2.43	3.0	85.5	2.65	5.3
IN10R85-30	IN30R85-30	85	66.8	89.96	90.5	2.92		88.5	3.15	5.3
IN10R90-30	IN30R90-30	90	71.8	94.96	95.5	2.92	3.0	93.5	3.15	5.3
IN10R92-30	IN30R92-30	92	73.6	96.96	97.5	2.92		95.5	3.15	5.3
IN10R95-30	IN30R95-30	95	76.4	99.96	100.5	2.92		98.5	3.15	5.3
IN10R98-30	IN30R98-30	98	79	102.96	103.5	2.92		101.5	3.15	5.3
IN10R100-30	IN30R100-30	100	81	104.96	105.5	2.92	4	103.5	3.15	5.3
IN10R102-40	IN30R102-40	102	82.6	107.46	108	3.9		106	4.15	6
IN10R105-40	IN30R105-40	105	85.6	111.46	112	3.9		109	4.15	6
IN10R108-40	IN30R108-40	108	88	114.46	115	3.9		112	4.15	6
IN10R110-30	IN30R110-40	110	88.2	116.46	117	3.9	114	4.15	6	


PHE GÀI LỖ TIÊU CHUẨN DIN 472

Vật liệu: IN10R THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)

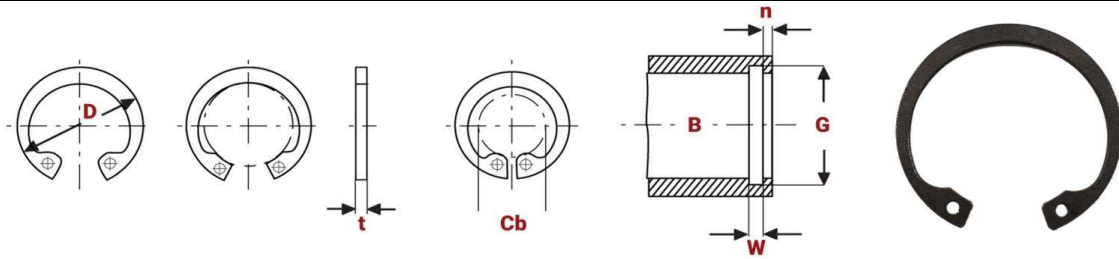


Mã hàng	Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ		
			D (mm)		t (mm)		G (mm)	W (mm)	n
			Min	Max	Min	Max			
IN10R112-40	112	90	118.46	119	3.9	4	116	4.15	6
IN10R115-40	115	93	121.37	122			119		
IN10R120-40	120	97	126.37	127			124		
IN10R125-40	125	102	131.37	132			129		
IN10R130-40	130	107	136.37	137			134		
IN10R135-40	135	112	141.37	142	3.9	4	139	4.15	7.5
IN10R140-40	140	117	146.37	147			144		
IN10R145-40	145	122	151.37	152			149		
IN10R150-40	150	125	157.37	158			155		
IN10R155-40	155	130	163.37	164			160		
IN10R160-40	160	133	168.37	169	3.9	4	165	4.15	7.5
IN10R165-40	165	138	173.87	174.5			170		
IN10R170-40	170	145	178.87	179.5			175		
IN10R175-40	175	149	183.78	184.5			180		
IN10R180-40	180	153	188.78	189.5			185		
IN10R185-40	185	157	193.78	194.5	3.9	4	190	4.15	7.5
IN10R190-40	190	162	198.78	199.5			195		
IN10R195-40	195	167	203.78	204.5			200		
IN10R200-40	200	171	208.78	209.5			205		
IN10R205-50	205	176	-	215			-		
IN10R210-50	210	181	221.28	222	4.88	5	216	5.15	9
IN10R215-50	215	186	-	227			221		
IN10R220-50	220	191	231.28	232			226		
IN10R225-50	225	196	-	237			231		
IN10R230-50	230	201	241.28	242			236		
IN10R235-50	235	206	-	247			241		
IN10R240-50	240	211	251.19	252			246		
IN10R245-50	245	216	-	257			251		
IN10R250-50	250	221	261.19	262			256		
IN10R255-50	255	226	-	268			261		
IN10R260-50	260	227	274.19	275	268	5.15	12		
IN10R265-50	265	233	-	280	271				
IN10R270-50	270	237	284.19	285	278				
IN10R275-50	275	242	-	290	283				
IN10R280-50	280	247	294.19	295	288				

PHE GÀI LỖ TIÊU CHUẨN DIN 472

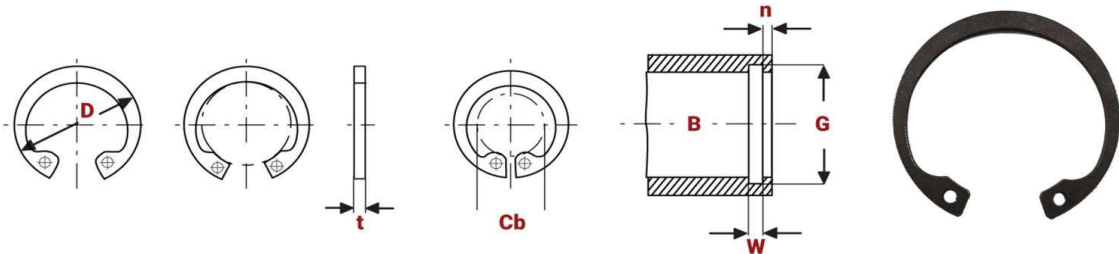Vật liệu	IN10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)							
									
Mã hàng	Đường kính B (mm)	Cb (mm)	Kích thước sản phẩm				Kích thước rãnh trên lỗ		
			D (mm)		t (mm)		G (mm)	W (mm)	n
Thép			Min	Max	Min	Max			
IN10R285-50	285	252	-	300	4.88	5	293	5.15	12
IN10R290-50	290	257	304.19	305			298		
IN10R295-50	295	262	-	310			303		
IN10R300-50	300	267	314.19	315			308		
IN10R360-50	360	321	-	377			370	6.2	15

VÒNG HẪM TRỤC CHỮ E TIÊU CHUẨN DIN 6799

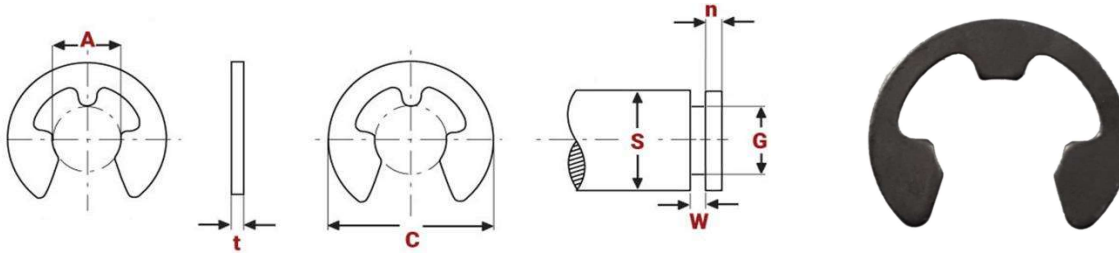Vật liệu	C10R	THÉP LÒ XO 65Mn (Độ Cứng 44-53 HRC)						
	C30R	INOX SUS420 (Độ Cứng 36-44 HRC)						
								
Mã hàng		Đường kính S (mm)	C (mm)	Kích thước sản phẩm		Kích thước rãnh trên lỗ		
Thép	Inox			A (mm)	t (mm)	G (mm)	W (mm)	n
C10R012	C30R012	1.4-2	2.90	1.2	0.3	1.2	0.34	0.6
C10R015	C30R015	2-2.5	3.90	1.5	0.4	1.5	0.44	0.8
C10R019	C30R019	2.5-3	4.40	1.9	0.5	1.9	0.5	1.0
C10R023	C30R023	3-4	5.90	2.3	0.6	2.3	0.64	1.0
C10R032	C30R032	4-5	6.90	3.2	0.6	3.2	0.64	1.0
C10R040	C30R040	5-7	8.85	4	0.7	4.0	0.74	1.2
C10R050	C30R050	6-8	10.85	5	0.7	5.0	0.74	1.2
C10R060	C30R060	7-9	11.80	6	0.7	6.0	0.74	1.2
C10R070	C30R070	8-11	13.80	7	0.9	7.0	0.94	1.5
C10R080	C30R080	9-12	15.75	8	1	8.0	1.05	1.8
C10R090	C30R090	10-14	18.20	9	1.1	9.0	1.15	2.0
C10R100	C30R100	11-15	19.70	10	1.2	10	1.25	2.0
C10R120	C30R120	13-18	22.70	12	1.3	12	1.35	2.5
C10R150	C30R150	16-24	28.70	15	1.5	15	1.55	3.0
C10R190	C30R190	20-31	36.50	19	1.75	19	1.80	3.5
C10R240	C30R240	25-38	43.50	24	2	24	2.05	4.0
C10R300	C30R300	32-42	51.50	30	2.5	30	2.55	4.5