


NON-INSULATED PARALLEL & BUTT CONNECTORS

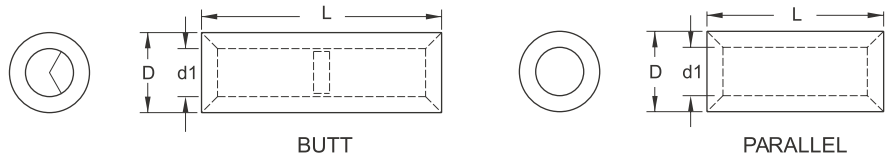

MAXIMUM ELECTRIC CURRENT:


A.W.G.	26	24	22	20	18	16	14	12	10	8
AMP.	5.5	7	9	12	17	18	30	35	50	70

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} / _{mm}				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
26-22 A.W.G. 0.2-0.5 mm ²	PNT0.5	.197 5.0	BNT0.5	.472 12.0	.083 2.1	.051 1.3	.016 0.4	K.S. MODEL KSTHT-203 WITH DIE INDEX NO:(INSUL)16-22	1000
22-16 A.W.G. 0.5-1.5 mm ²	PNT1	.315 8.0	BNT1	.591 15.0	.130 3.3	.067 1.7	.031 0.8	IZUMI MODEL 5N18 WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:22-18	1000
			BNT1-16	.630 16.0					1000
16-14 A.W.G. 1.5-2.5 mm ²	PNT2	.315 8.0	BNT2	.591 15.0	.154 3.9	.091 2.3	.031 0.8	IZUMI MODEL 5N18 WITH DIE INDEX NO:2 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:16-14	1000
	PNT2-7	.276 7.0							
	PNT2-15	.591 15.0	BNT2-16	.630 16.0					
14-12 A.W.G. 2.5-4 mm ²	PNT3	.335 8.5	BNT3	.591 15.0	.197 5.0	.118 3.0	.039 1.0	IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
12-10 A.W.G. 4-6 mm ²	PNT5	.335 8.5	BNT5	.591 15.0	.213 5.4	.134 3.4	.039 1.0	IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
			BNT5-20	.787 20.0					
	PNT5-15	.335 15.0	BNT5-21	.827 21.0					
			BNT5-30	1.181 30.0					
8 A.W.G. 8 mm ²	PNT8	.374 9.5	BNT8	.827 21.0	.276 7.0	.181 4.6	.047 1.2	IZUMI MODEL 5N18 12#A WITH DIE INDEX NO:1.8 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:8	1000/500
			BNT8-42	1.654 42.0					250

ALL LISTED

NON-INSULATED PARALLEL & BUTT CONNECTORS

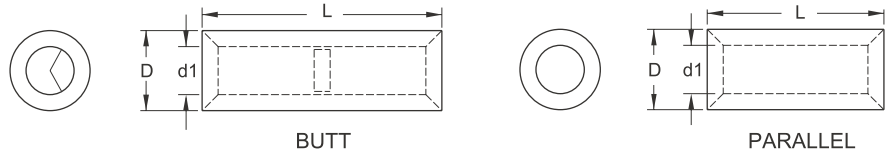

MAXIMUM ELECTRIC CURRENT:


A.W.G.	6	4	2	1/0	2/0	3/0	4/0	250	300
AMP.	95	125	170	230	265	310	360	405	445

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} / _{mm}				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
6 A.W.G. 14 mm ²	PNT14	.433 11.0	BNT14	1.024 26.0	.350 8.9	.232 5.9	.059 1.5	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:14	500
6 A.W.G. 16 mm ²	PNT16-8	.315 8.0			.374 9.5	.272 6.9	.052 1.32		
8 A.W.G. 6 A.W.G. 22 mm ²	PNT22	.531 13.5	BNT22	1.142 29.0	.445 11.3	.307 7.8	.069 1.75	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:22	250
			BNT22-58	2.283 58.0					
2 A.W.G. 38 mm ²	PNT38	.650 16.5	BNT38	1.260 32.0	.520 13.2	.374 9.5	.073 1.85	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:38	250
			BNT38-64	2.520 64.0					
1/0 MCM 60 mm ²	PNT60	.748 19.0	BNT60	1.417 36.0	.602 15.3	.449 11.4	.077 1.95	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:60	100
			BNT60-72	2.835 72.0					
2/0 MCM 70 mm ²	PNT70	.748 19.0	BNT70	1.457 37.0	.689 17.5	.524 13.3	.083 2.1	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:70	100
3/0 MCM 80 mm ²	PNT80	.768 19.5	BNT80	1.496 38.0	.768 19.5	.571 14.5	.098 2.5	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:80	50
			BNT80-76	2.992 76.0					
4/0 MCM 100 mm ²	PNT100	.787 20.0	BNT100	1.496 38.0	.870 22.1	.646 16.4	.112 2.85	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:100	50
			BNT100-76	2.992 76.0					
250/300 MCM 150 mm ²	PNT150	1.063 27.0	BNT150	2.126 54.0	1.039 26.4	.768 19.5	.136 3.45	IZUMI MODEL 12#A WITH DIE INDEX NO:150	25
			BNT150-108	4.252 108.0					

UL cUL ALL LISTED

NON-INSULATED PARALLEL & BUTT CONNECTORS

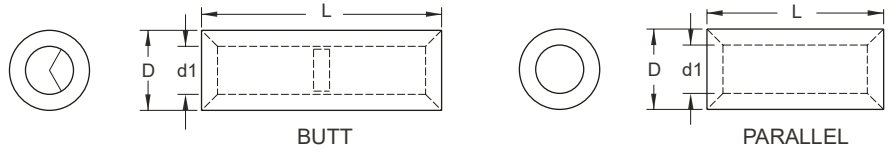

MAXIMUM ELECTRIC CURRENT:

A.W.G.	300	350	400	500	600
AMP.	445	505	545	620	690

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.				DIMENSION <small>inch mm</small>			CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
300/350 MCM 180 mm ²	PNT180	1.122 28.5	BNT180	2.244 57.0	1.122 28.5	.827 21.0	.148 3.75	IZUMI MODEL 12#A WITH DIE INDEX NO:180	10
			BNT180-114	4.488 114.0					10
400/500 MCM 200 mm ²	PNT200	1.260 32.0	BNT200	2.480 63.0	1.276 32.4	.945 24.0	.165 4.2	IZUMI MODEL 12#A WITH DIE INDEX NO:200	10
			BNT200-126	4.961 126.0					10
500/600 MCM 325 mm ²	PNT325	1.457 37.0	BNT325	2.835 72.0	1.457 37.0	1.102 28.0	.177 4.5	IZUMI MODEL 12#A WITH DIE INDEX NO:325	5
			BNT325-144	5.670 144.0					

ALL LISTED

