

# NYLON-FULLY INSULATED DOUBLE CRIMP RECEPTACLE DISCONNECTORS

**MAXIMUM ELECTRIC CURRENT:**

A.W.G.	22	20	18	16	14
AMP.	3	4	7	10	15

**MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.**

**INSULATION MATERIAL: NYLON      TERMINAL MATERIAL: BRASS**

**INSULATION COLOR:**

22-18 A.W.G.: TRANSPARENT

22-16 A.W.G.: RED ■

16-14 A.W.G.: BLUE ■

**DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL**

**TERMINAL BARREL I.D.:**

22-18 A.W.G.: C=1.6mm

22-16 A.W.G.: C=1.7mm

16-14 A.W.G.: C=2.3mm

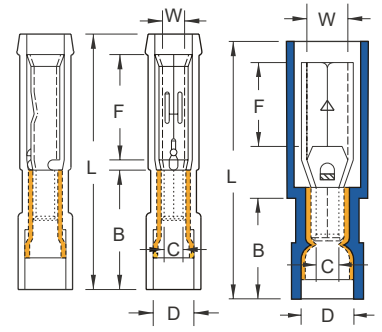


FIG-1

FIG-2

WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.	DIMENSION <small>inch mm</small>						FIG	CRIMPING TOOL	Q'TY BOX
		W	F	L	B	D	T			
22-18 A.W.G. 0.5-0.75 mm <sup>2</sup>	FRFNYD0.5-078	.081 2.05	.394 10.0	.976 24.8	.433 11.0	.138 3.5	.012 0.3	1	K.S. MODEL <b>KST2000C</b> WITH DIE INDEX COLOR: RED	1000
22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>	FRFNYD1-156	.154 3.9	.276 7.0	.992 25.2	.433 11.0	.157 4.0	.016 0.4	2	IZUMI MODEL 34 OR K.S. MODEL <b>KST2000A</b> WITH DIE INDEX COLOR:RED	1000
	FRFNYD1-180	.173 4.4								1000
16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>	FRFNYD2-156	.154 3.9	.276 7.0	.992 25.2	.433 11.0	.197 5.0	.016 0.4	2	IZUMI MODEL 34 OR K.S. MODEL <b>KST2000A</b> WITH DIE INDEX COLOR:BLUE	1000
	FRFNYD2-180	.173 4.4								1000
	FRFNYD2-195	.193 4.9	.276 7.0	1.063 27.0	500					

# NYLON-FULLY INSULATED DOUBLE CRIMP BULLET DISCONNECTORS

**MAXIMUM ELECTRIC CURRENT:**

A.W.G.	22	20	18	16	14
AMP.	3	4	7	10	15

**MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.**

**INSULATION MATERIAL: NYLON      TERMINAL MATERIAL: BRASS**

**INSULATION COLOR:**

22-18 A.W.G.: TRANSPARENT

22-16 A.W.G.: RED ■

16-14 A.W.G.: BLUE ■

**DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL**

**TERMINAL BARREL I.D.:**

22-18 A.W.G.: C=1.6mm

22-16 A.W.G.: C=1.7mm

16-14 A.W.G.: C=2.3mm

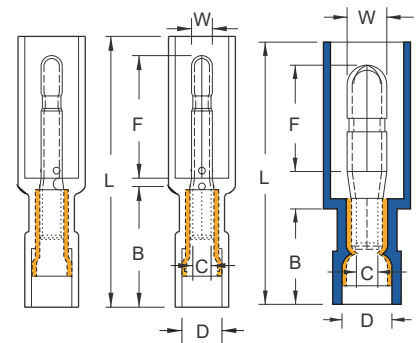


FIG-1

FIG-2

WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.	DIMENSION <small>inch mm</small>						FIG	CRIMPING TOOL	Q'TY BOX
		W	F	L	B	D	T			
22-18 A.W.G. 0.5-0.75 mm <sup>2</sup>	MPFNYD0.5-078	.079 2.0	.472 12.0	1.063 27.0	.433 11.0	.138 3.5	.012 0.3	1	K.S. MODEL <b>KST2000C</b> WITH DIE INDEX COLOR:RED	1000
22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>	MPFNYD1-156	.157 4.0	.412 10.5	1.063 27.0	.394 10.0	.157 4.0	.016 0.4	2	IZUMI MODEL 34 OR K.S. MODEL <b>KST2000A</b> WITH DIE INDEX COLOR:RED	500
	MPFNYD2-156	.157 4.0								.413 10.5