




1.4 Heavy Duty Cable Ties

1.4.1 Nylon Cable Ties


Material: PA66
Flammability rating: UL94V-2

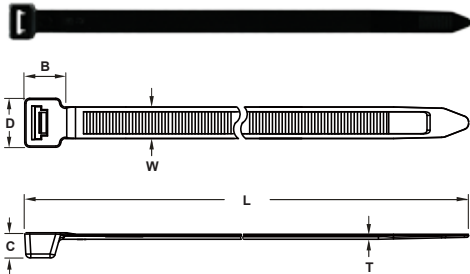

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-480X	480	12.6	14.4	10.0	19.5	2	10	120	250	100 PCS
K-580X	580	12.6	14.4	10.0	19.5	2	10	152	250	100 PCS
K-730X	730	12.6	14.4	10.0	19.5	2	10	217	250	100 PCS
K-1030X	1030	12.6	14.4	10.0	19.5	2	10	295	250	100 PCS

1.4.2 Weather Resistant UV Type


Material: PA66 (Ultraviolet)
Flammability rating: UL94V-2
Color: Black

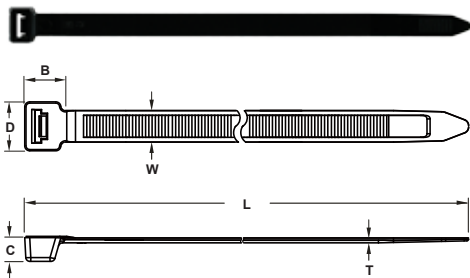


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-480XU	480	12.6	14.4	10.0	19.5	2	10	120	250	100 PCS
K-580XU	580	12.6	14.4	10.0	19.5	2	10	152	250	100 PCS
K-730XU	730	12.6	14.4	10.0	19.5	2	10	217	250	100 PCS
K-1030XU	1030	12.6	14.4	10.0	19.5	2	10	295	250	100 PCS

1.5 Markable Cable Ties

Material: PA66
Flammability rating: UL94V-2

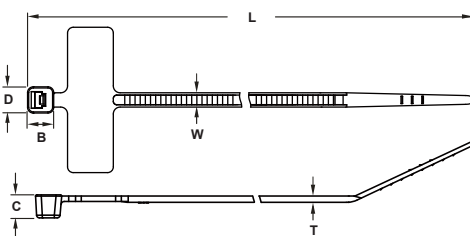

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KI-100M	100	2.5	4.5	3.8	4.5	1	1.6	18	18	100 PCS

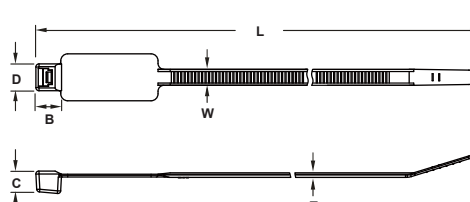

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KI-200S	200	4.6	7.0	5.8	7.7	1.3	3.0	55	50	100 PCS