

GT5P Series — ON Delay Timers

Key features:

- SPDT, 5A contacts
- 8-pin, octal base
- 9 time ranges
- Repeat error $\pm 0.2\%$ maximum
- Control settings by hand or screwdriver
- Power ON and timing out LED indicators
- Uses the same sockets and hold down clips as IDEC's RR2P 8-pin relays



UL Recognized
File No. E55996



CSA Certified
File No. LR66809



Specifications

Rated Operating Voltage		100 to 120V AC (50/60Hz) 200 to 240V AC (50/60Hz) 24V AC/DC 12V DC
Voltage Tolerance		AC type: $\pm 15\%$ DC type: $\pm 10\%$ (ripple 10% maximum)
Contact Rating	Resistive load	120V AC/24V DC, 5A 240V AC, 3A
	Inductive load	240V AC, 0.8A 120V AC, 1.4A 24V DC, 1.7A
Allowable Contact Power (resistive load)		960VA AC 120W DC
Contact Form		SPDT
Voltage		250V AC, 150V DC
Repeat Error		$\pm 0.2\% \pm 10\text{msec}$
Voltage Error		$\pm 0.5\% \pm 10\text{msec}$
Temperature Error		$\pm 3\%$ maximum (over -10 to 50°C , reference temperature 20°C)
Setting Error		$\pm 10\%$ maximum
Reset Time		When turning power off after time up: 0.1 sec maximum When turning power off before time up: 1 sec maximum
Insulation Resistance		100M Ω minimum
Dielectric Strength		2000V AC, 1 minute (except between contacts of the same pole)
Vibration Resistance		100N (approximate 10G)
Shock Resistance		Operating extremes: 100N (approximate 10G) Damage limits: 500N (approximate 50G)
Power Consumption		100V AC type: 1.5VA (at 50Hz) 200V AC type: 1.6VA (at 50Hz) 24V DC type: 0.9W
Electrical Life		100,000 operations minimum (at rated load)
Mechanical Life		20,000,000 operations minimum
Operating Temperature		-10 to $+50^\circ\text{C}$
Operating Humidity		45 to 85% RH



1. Inductive load (reference), $\cos \phi = 0.3$ to 0.4 or $L/R = 15\text{msec}$.
2. Minimum applicable load: 5VDC/10mA (reference).

Part Numbering List

Mode of Operation	Contact	Output	Rated Voltage	Time Range	Complete Part No.
ON-Delay	SPDT	24V DC/120V AC, 5A 240V AC, 3A	100 to 120V AC	1S	—
				3S	GT5P-N3SA100
				6S	—
				10S	GT5P-N10SA100
				30S	GT5P-N30SA100
				60S	GT5P-N60SA100
				3M	GT5P-N3MA100
				6M	GT5P-N6MA100
				10M	GT5P-N10MA100
			200 to 240V AC	1S	GT5P-N1SA200
				3S	—
				6S	GT5P-N6SA200
				10S	GT5P-N10SA200
				30S	GT5P-N30SA200
				60S	GT5P-N60SA200
				3M	GT5P-N3MA200
				6M	GT5P-N6MA200
				10M	GT5P-N10MA200
			24V AC/DC	1S	GT5P-N1SAD24
				3S	—
				6S	GT5P-N6SAD24
				10S	GT5P-N10SAD24
				30S	—
				60S	GT5P-N60SAD24
				3M	—
				6M	GT5P-N6MAD24
				10M	GT5P-N10MAD24
			12V DC	1S	—
				3S	—
				6S	—
				10S	GT5P-N10SD12
				30S	GT5P-N30SD12
				60S	GT5P-N60SD12
				3M	—
				6M	—
				10M	GT5P-N10MD12




For sockets and accessories, see page 941.

Timing Diagram/Schematic/Electrical Life Curves


SPDT

Operation Mode




Do not apply voltage to terminals 1, 3, and 4.

ON-Delay

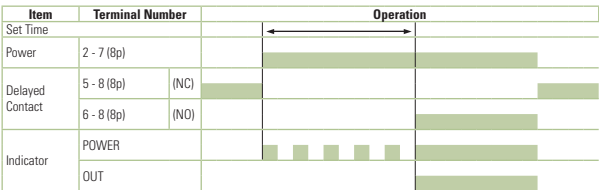

Electrical Life Curves

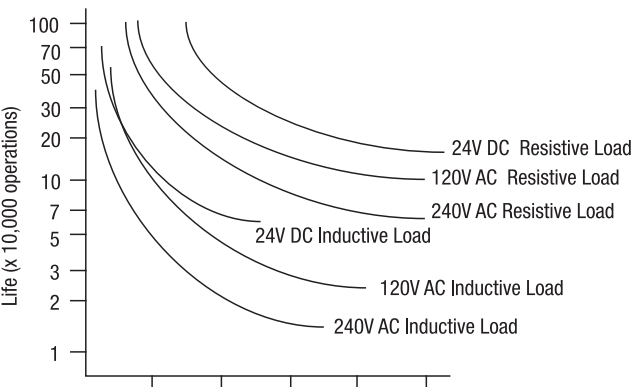

Switches & Pilot Lights

Signaling Lights

Relays & Sockets

Timers

Contactors



Terminal Blocks

Circuit Breakers


Accessories
Mounting

Mounting Accessories and Sockets					Applicable Hold-Down Springs	
	Style	Appearance	Use with Timers	Part No.	Appearance	Part No.
DIN Rail/ Surface Mounting Accessories	8-Pin Screw Terminal (dual tier)		GT5P	SR2P-05		SFA-203
	8-Pin Fingersafe Socket		GT5P	SR2P-05C		
	8-Pin Screw Terminal		GT5P	SR2P-06		SFA-202
	DIN Mounting Rail Length 1000mm		—	BNDN1000		
Part Numbers: Mounting Accessories and Sockets					Applicable Hold-Down Springs	
Mounting Accessories	8-Pin Solder Terminal			SR2P-51		SFA-402

Installation of Hold-Down Springs
DIN Rail Mount Socket

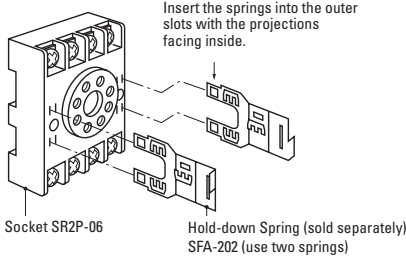

Panel Mount Socket




Dimensions

GT5P Timer, 8-Pin with SR2P-05

(When using DIN rail)

BAA, BAP: 102 max. (Note 2)

98 max. (Note 1)

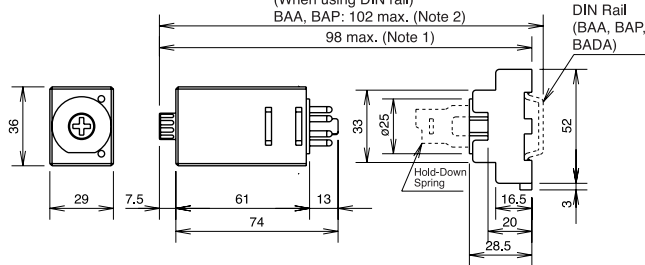**GT5P Timer, 8-Pin with SR2P-06**

(When using DIN rail)

BAA, BAP: 95.5 max

91.5 max.

