


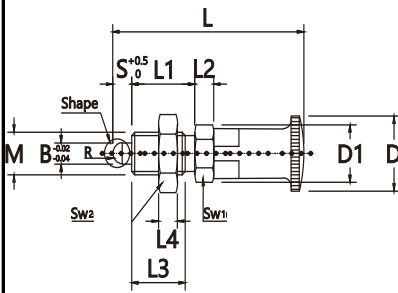
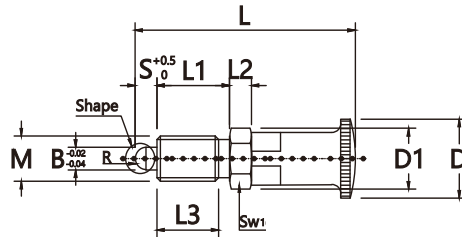



ORDER:	TYPExM	Shape		
	EXAMPLE: MP058A8	□□□□□	□□□□□	□□□□□
				



Materials

Thread Type	Rest Position			Knob	Main Body			Pin			Spring	Lock Nut	
	Spherical	Tapered	Flat		M	M	S	M	H	S		M	S
Fine Thread	MP058A	MP058E	MP058K	A2017	SUM22	Black Oxide	S45C	50~60HRC	Black oxide	SUS631J1	-	-	
	MP058B	MP058F	MP058L								SS400	Black oxide	
	MP058C	MP058G	MP058M		-	-							
	MP058D	MP058H	MP058N		SUS303	-							
					SUS303		SUS440C	45HRC~	-		SUS303	-	

Specifications

Part Number		D	D1	S	B	L	L1	L2	L3	L4	Sw	SR	N		
Type	M												min	max	
ALL TYPE	5	0.5	10	8.1	5	2	35	15	3	14	2.7	7	1	1	6
	6	0.75	12	9.2	5	2.5	36	15	4	13.5	3.2	8	1.3	1	6
	8	1	15	11.5	4	4	40	16	5	14	4	10	2	3	9
	8L				6		42								12
	10	1	18	13.8	5	5	45	17	5	15	5	12	2.5	5	11.5
	10L				8		48								16
	12	1.5	21	16.2	6	6	54.5	20	6	17	6	14	3	6.5	14.5
	12L				10		58.5								20
	16	1.5	26	21.9	7	8	68	26	8	23	8	19	4	7.5	18
	16L				12		73								26