

Technical data


4T-30305D

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



VISUAL (S)

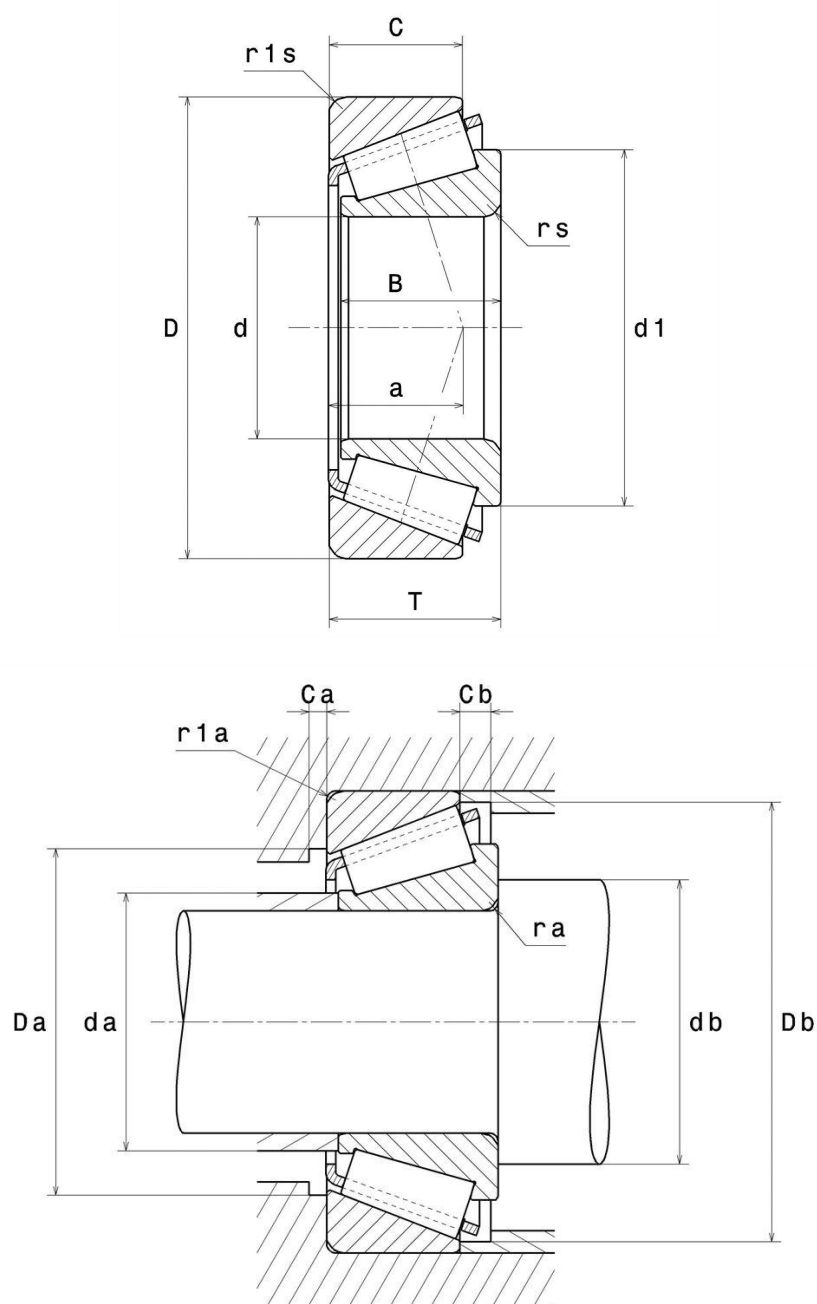

4T-30305D

Single row tapered roller bearings

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	25 mm
D - External diameter	62 mm
B - Bearing/Inner ring width	17 mm
C - Outer ring width	13 mm
T - Total width	18,25 mm
d1 - External diameter inner ring	46 mm
a - Charge load application point	20 mm
rs - Min fillet radius	1,5 mm
r1s - Min fillet radius	1,5 mm
Mass	0,266 kg
ISO 355 reference	T7FB025

PRODUCT PERFORMANCE

C - Dynamic load	45 kN
C0 - Static load	43,5 kN
Cu - Fatigue limit load	5,3 kN
A2 - Rating life coefficient	1
e - Coefficient	0.83
Y0 - Static axial load coefficient	0.4
Y2 - Upper axial load coefficient	0.73
N lim - Oil lubrication limit speed	7800 tr/min
N lim - Grease lubrication limit speed	5900 tr/min
Tmin - Min operating temperature	-40 °C



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

4T-30305D

Single row tapered roller bearings

PRODUCT PERFORMANCE

Tmax - Max operating temperature

120 °C

ABUTMENT

da max - Max shoulder diameter IR

34 mm

db min - Min IR shoulder diameter

33,5 mm

Da min - Min shoulder diameter OR

45,5 mm

Da max - Max shoulder diameter OR

53,5 mm

Db min - Min OR shoulder diameter

58,5 mm

Ca - Min clearance

3 mm

Cb - Min clearance

5 mm

ra max - Max fillet radius

1,5 mm

r1a - Max fillet radius

1,5 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.5	Y0

If $P_0 \leq F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table

