



Image may differ from product. See technical specification for details.

6304-2ZNR

Deep groove ball bearing with snap ring and integral sealing

Single row deep groove ball bearing, with snap ring groove and seals or shields on one or both sides, are particularly versatile, have low friction and are optimized for low noise and low vibration, which enables high rotational speeds. They accommodate radial and axial loads in both directions, are easy to mount, and require less maintenance than other bearing types. The snap ring, fitted in an annular groove in the outer ring, facilitates axial location of the bearings within their housings. The integral sealing can significantly prolong bearing service life because it keeps lubricant in the bearings and contaminants out.

- Snap ring facilitates axial location within housing
- Integral sealing prolongs bearing service life
- Typical benefits of single row deep groove ball bearings

Apžvalga

Dimensions

Bore diameter	20 mm
Outside diameter	52 mm
Width	15 mm

Performance

Basic dynamic load rating	16.8 kN
Basic static load rating	7.8 kN
Reference speed	30 000 r/min
Limiting speed	15 000 r/min
SKF performance class	SKF Explorer


Properties

Filling slots	Without
Number of rows	1
Locating feature, bearing outer ring	Snap ring (fitted)
Bore type	Cylindrical
Cage	Sheet metal
Matched arrangement	No
Radial internal clearance	CN
Material, bearing	Bearing steel
Coating	Without
Sealing	Shield on both sides
Sealing type	Non-contact
Lubricant	Grease
Relubrication feature	Without

Logistics


Product net weight	0.149 kg
eClass code	23-05-08-01
UNSPSC code	31171504

Techninė specifikacija

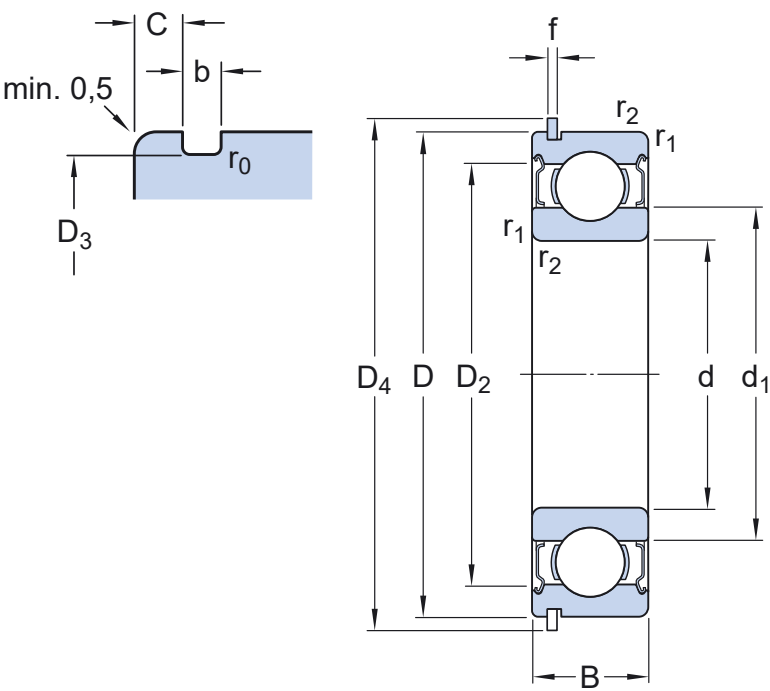

Dimensions

d	20 mm	Bore diameter
t _{Δdmp}	-0.008 – 0 mm	Deviation limits of mid-range bore diameter
D	52 mm	Outside diameter
t _{ΔDmp}	-0.011 – 0 mm	Deviation limits of mid-range outside diameter
B	15 mm	Width
t _{ΔBs}	-0.06 – 0 mm	Deviation limits of ring width
d ₁	≈ 30.35 mm	Shoulder diameter
D ₂	≈ 44.71 mm	Recess diameter
D ₃	49.73 mm	Diameter of snap ring groove
D ₄	57.9 mm	Outside diameter of snap ring
b	1.35 mm	Width of snap ring groove
C	2.46 mm	Distance from outer ring side face to snap ring groove
f	1.12 mm	Width of snap ring
r ₀	max. 0.4 mm	Bottom radius of snap ring groove
r _{1,2}	min. 1.1 mm	Chamfer dimension
P6 and tighter width tolerance		ISO tolerance class for dimensions

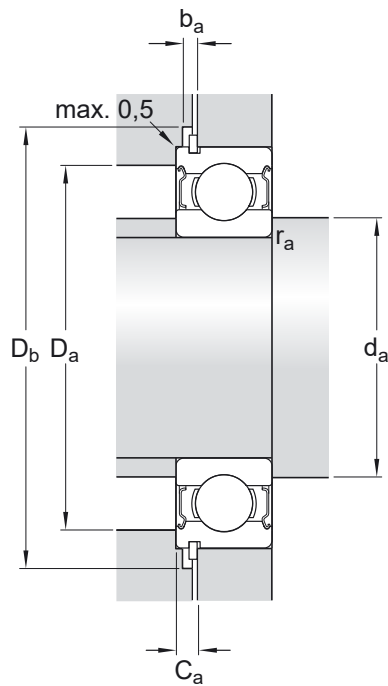

Abutment dimensions

d_a	min. 27 mm	Diameter of shaft abutment
d_a	max. 30.3 mm	Diameter of shaft abutment
D_a	max. 45 mm	Diameter of housing abutment
D_b	min. 59 mm	Diameter of snap ring recess in the housing
b_a	min. 1.5 mm	Width of snap ring recess in the housing
C_a	max. 3.58 mm	Distance from outer ring side face to snap ring back face
r_a	max. 1 mm	Radius of shaft or housing fillet

Calculation data

SKF performance class		SKF Explorer
Basic dynamic load rating	C	16.8 kN
Basic static load rating	C_0	7.8 kN
Fatigue load limit	P_u	0.335 kN
Reference speed		30 000 r/min
Limiting speed		15 000 r/min
Minimum load factor	k_r	0.03
Calculation factor	f_0	12

Tolerances of run-out

Range of section height at inner ring of assembled bearing	t _{Kia}	4 μm
Maximum run-out of inner ring side face to the bore	t _{Sd}	8 μm
Maximum axial run-out of inner ring of assembled bearing	t _{Sia}	8 μm
Range of section height at outer ring of assembled bearing	t _{Kea}	8 μm
Perpendicularity of outer ring outside surface	t _{SD}	4 μm
Maximum axial run-out of outer ring of assembled bearing	t _{Sea}	10 μm
ISO tolerance class for geometrical tolerances		P5

Included products

Snap ring	SP 52
-----------	-------

Tolerancijos ir suleidimai

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (metric), P6, P5, Normal (inch)
- Radial internal clearance: Classes C2 to C5

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fits

Daugiau informacijos

 Product details	 Engineering information	 Tools
Single row deep groove ball bearings	Principles of rolling bearing selection	SKF Product select
Stainless steel deep groove ball bearings	General bearing knowledge	SimPro Quick
Single row deep groove ball bearings with filling slots	Bearing selection process	Bearing Frequency Calculator
Double row deep groove ball bearings	Bearing interfaces	LubeSelect for SKF greases
General bearing specifications	Seat tolerances for standard conditions	Heater selection tool
Loads	Selecting internal clearance	
Temperature limits	Lubrication	
Permissible speed	Sealing, mounting and dismounting	
Designation system	Bearing failure and how to prevent it	

Nuostatos ir sąlygos

Atverdami ir naudodami šią svetainę / programą, priklausančią bendrovei AB SKF ir jos skelbiamą (biržinė bendrovė) (556007-3495 Geteborgas) (toliau vadinama SKF), sutinkate su toliau nurodytomis sąlygomis ir nuostatomis:

Garantijos nepripažinimas ir atsakomybės ribojimas

Nors buvo imtasi visų priemonių siekiant užtikrinti informacijos šioje svetainėje / programoje tikslumą, SKF pateikia šią informaciją „KAIP YRA“ ir NEPRIPAŽIJA VISŲ GARANTIJŲ, IŠREIKŠTŲ AR NUMANOMŲ, ĮSKAITANT, BET NEAPSIRIBOJANT, NUMANOMŲ PREKYBOS GARANTIJŲ AR TINKAMUMO KONKREČIAM TIKSLUI. Pripažįstate, kad prisiimate visišką atsakomybę už visas išlaidas, susijusias su šios svetainės / programos naudojimu, ir riziką, kad SKF nebus atsakinga už jokią tiesioginę, atsitiktinę, logiškai atsirandančią ar netiesioginę bet kokio pobūdžio žalą, kilusią dėl to, kad atvėrėte svetainę / programą, naudojote informaciją ar programas, prieinamas šioje svetainėje / programoje.

Dėl SKF produktų ar paslaugų, kuriuos pirksite ar naudosite, garantijų ir pristatymų šioje svetainėje / programoje bus susitarta ir tai bus pažymėta sutarties dėl tokių produktų ar paslaugų sąlygose ir nuostatose.

Be to, SKF neteikia garantijų dėl ne SKF svetainės / programose, kurios nurodomos mūsų svetainėje / programoje ar kurioms nurodyta sąsajų sistema, pateikiamos informacijos tikslumo ar patikimumo ir neprisiima atsakomybės už čia trečiųjų šalių sukurtą ar paskelbtą medžiagą. Taip pat SKF negarantuoja, kad ši svetainė / programa ar kitos susietos svetainės / programos neturi virusų ar kitų žalingų elementų.

Trečiųjų šalių paslaugos

Žiūrėdami „YouTube“ turinį per SKF svetainę (-es) (t. y. naudodami „YouTube“ API paslaugas) sutinkate laikytis „YouTube“ [paslaugų teikimo sąlygų](#).

Autorių teisės

Šios svetainės / programos informacijos ar programų autorių teisę turi SKF ar jos licencijos turėtojai. Visos teisės priklauso autoriams. Visa licencijuota medžiaga pateikiama nurodant licencijos turėtoją, suteikęs SKF teisę naudoti medžiagą. Be išankstinio rašytinio SKF sutikimo negalima atgaminti, dubliuoti, kopijuoti, perduoti, platinti, laikyti, keisti, parsisiųsti ar kitaip naudoti komerciniams tikslams informacijos ir programų, kurios prieinamos šioje svetainėje / programoje. Tačiau asmenys ją gali atkurti, laikyti ar parsisiųsti naudoti asmeniškai be išankstinio SKF rašytinio sutikimo. Jokiomis aplinkybėmis šios informacijos ar programų negalima teikti trečiosioms šalims.

Šioje svetainėje / programoje yra tam tikrų pagal „Shutterstock, Inc.“ licenciją naudojamų iliustracijų.

Prekių ženklai ir patentai

Visi prekių ženklai, firminiai pavadinimai ar korporacijų logotipai, pateikti svetainėje / programoje, yra SKF ar jos licencijų teikėjų nuosavybė ir negali niekaip būti naudojami be išankstinio rašytinio SKF sutikimo. Visi licencijas turintys prekių ženklai, paskelbti šioje svetainėje / programoje, nurodo licencijos teikėją, suteikęs SKF teisę naudoti šį prekių ženklą. Įėjimas į šią svetainę / programą nesuteikia naudotojui licencijos pagal patentą, kurią turi ar kurios savininkė yra SKF.

Pakeitimai

SKF pasilieka teisę daryti šios svetainės / programos ar šių sąlygų ir nuostatų pakeitimus bet kuriuo metu.